
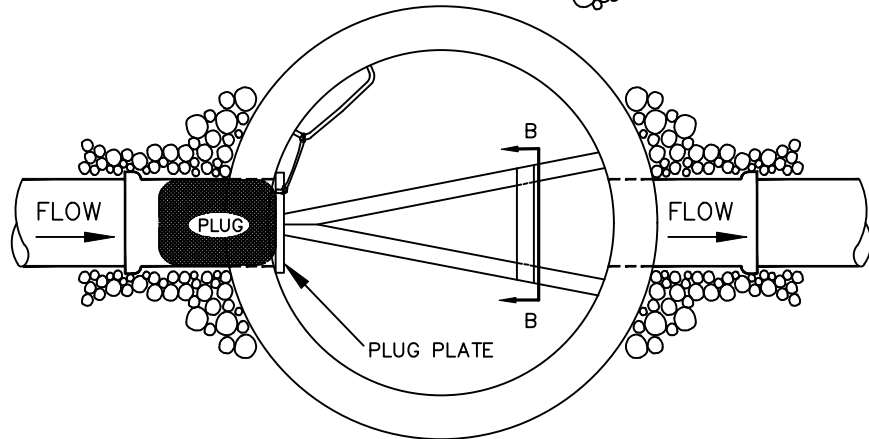


SECTION B-B

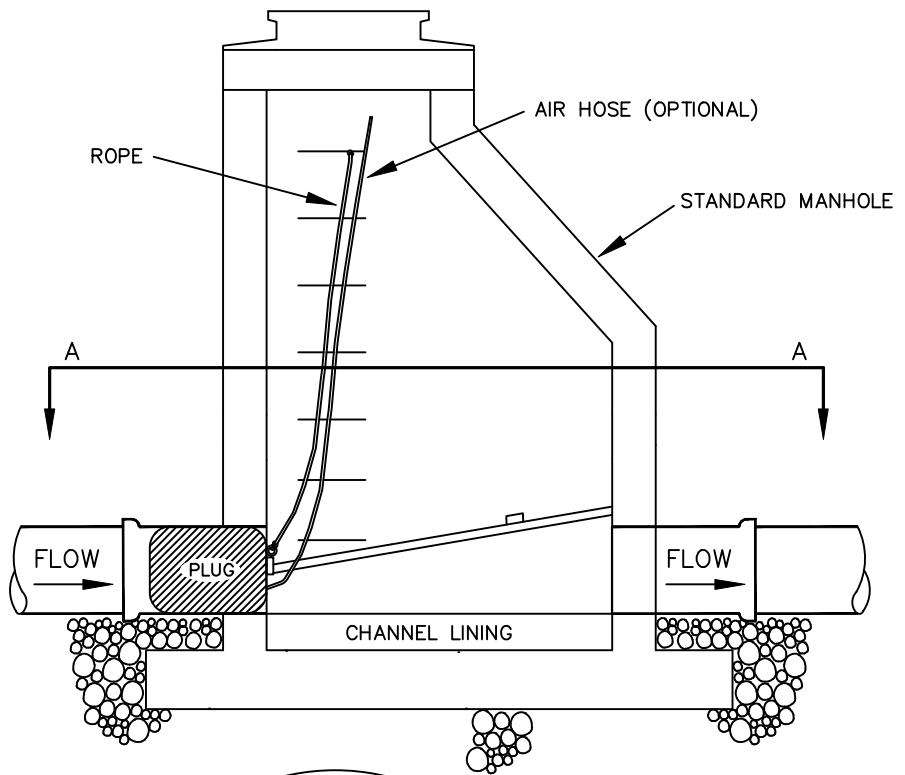

SECTION A-A

NOTES:

1. ALL PLUGS SHALL BE UTILIZED TO ISOLATE ALL DISCHARGE INTO CHARLES COUNTY'S SEWER SYSTEM. PLUGS SHALL BE UTILIZED FOR ALL SEWAGE BY PASS OPERATIONS.
2. ALL PLUGS SHALL BE PLACED IN THE UPSTREAM LINE OF THE MANHOLE AND SHALL BE SECURED WITH A STEEL CHAIN AND TIED TO A 4" X 4" WOOD TO PREVENT IT FROM GOING DOWN THE LINE.
3. ALL PLUGS SHALL BE BRACED AS SHOWN WITH PRESSURE TREATED 2" X 4" WOOD AND ASSEMBLED USING 16 PENNY HOT DIPPED GALVANIZED FASTNERS. PLUG PLATE SHALL BE 1" LONGER THAN THE CORED OPENING DIAMETER IN THE MANHOLE AND REST FIRMLY AGAINST PLUG.
4. DEVELOPER/CONTRACTOR SHALL COORDINATE THE TIMING AND PLACEMENT OF ALL PLUGS WITH THE DEPARTMENT OF PLANNING AND GROWTH MANAGEMENT, CODES, PERMITS, AND INSPECTION SERVICES (PGM/CPIS) INSPECTOR. THE DEVELOPER/CONTRACTOR IS RESPONSIBLE FOR PUMPING OUT ANY MANHOLE/MAIN CONTAINING WATER.
5. UPON COMPLETION OF ALL OR PORTION OF THE SEWER SYSTEM AND UPON ACCEPTANCE (SUBSTANTIAL COMPLETION) BY PGM/CPIS AND PUBLIC WORKS UTILITIES, THE DEVELOPER/CONTRACTOR SHALL NOTIFY THE PGM/CPIS INSPECTOR TO COORDINATE THE REMOVAL OF THE PLUG(S).



CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED: Raymond N. Shumaker, Jr. Aug 8, 2023
Raymond N. Shumaker, Jr. (Aug 8, 2023 12:00 EDT)
 CHIEF OF CODES, PERMITS, & INSPECTION SERVICES DATE

Andy Smith Aug 8, 2023
Andy Smith (Aug 8, 2023 14:49 EDT)
 PROFESSIONAL ENGINEER DATE

STANDARD DETAIL

SEWER MAIN
 TEMPORARY PLUG

S
 1.13

REVISIONS:
 DECEMBER 2022