


FIRE HYDRANT GUARD

FIRE HYDRANT NOTES

1. USE HYDRANT GUARDS AT ALL FIRE HYDRANTS. (2 EACH HYDRANT) AS REQUIRED BY THE COUNTY.
2. 3" PIPE TO BE FILLED WITH CONCRETE AND PAINTED RED WITH REFLECTIVE YELLOW STRIPS (PER SPECIFICATIONS).
3. HYDRANT TO BE PAINTED YELLOW, PER SPECIFICATIONS.
4. CONTRACTOR TO FURNISH ONE FIRE HYDRANT WRENCH FOR THE PROJECT.
5. REFLECTIVE WHITE TAPE SHOULD MEET DOT SPECIFICATIONS FP-85 FOR TYPE II SHEETING. IT SHOULD BE 3" O.C. FROM TOP OF THE PIPE. BOTH TAPES SHOULD BE 2" APART.

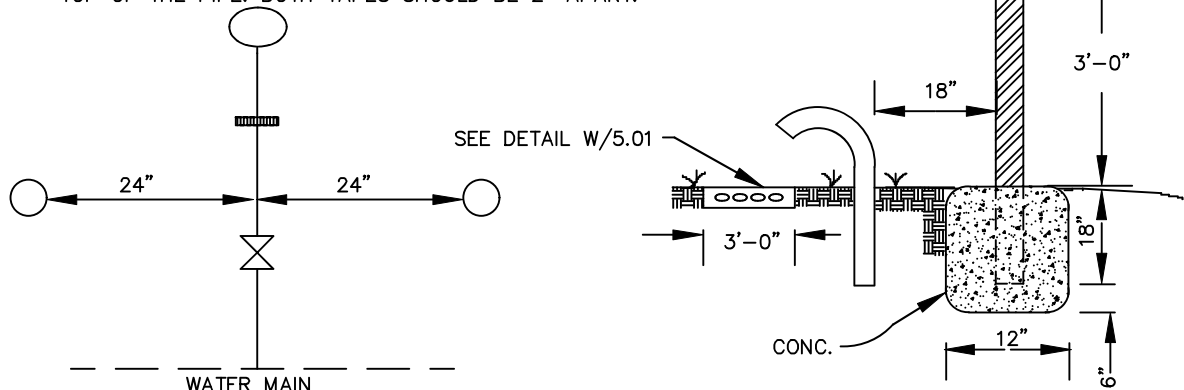

BLOWOFF GUARD

BLOWOFF NOTES

1. USE BLOWOFF GUARDS AT ALL BLOWOFFS. (2 EACH BLOWOFF) AS REQUIRED BY THE COUNTY.
2. 3" PIPE TO BE FILLED WITH CONC. AND PAINTED RED WITH YELLOW STRIPS.
3. BLOWOFF NOZZLE TO BE PAINTED YELLOW.



CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

Raymond N. Shumaker, Jr. Oct 5, 2022
Raymond N. Shumaker, Jr. (Oct 5, 2022 12:20 EDT)
 CHIEF OF CODES, PERMITS, & INSPECTION SERVICES

H.B.M.

DATE
 Oct 5, 2022

PROFESSIONAL ENGINEER

DATE

STANDARD DETAIL

FIRE HYDRANT GUARD AND BLOWOFF GUARD

W
 5.06

REVISIONS:
 JUNE 1995
 SEPTEMBER 2022