


PLAN VIEW

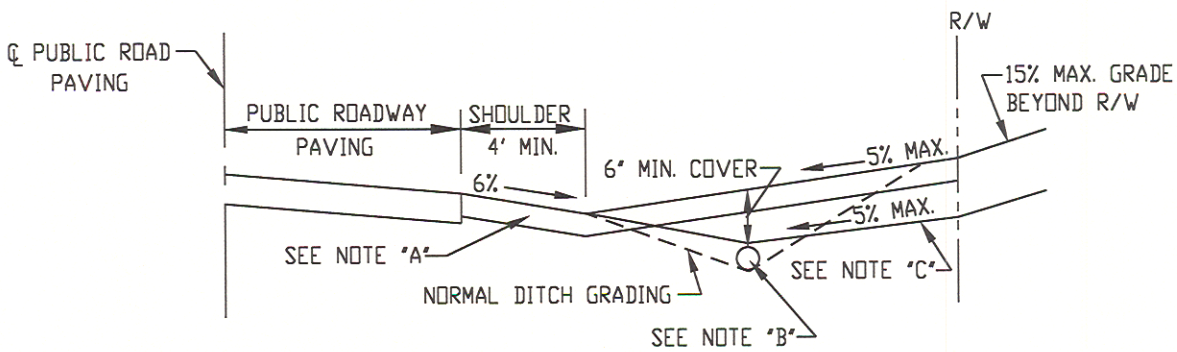

SECTION A-A

NOTES:

- A. DRIVEWAY MUST BE PAVED FROM EDGE OF PUBLIC ROAD TO RIGHT-OF-WAY LINE. FOR PAVEMENT TYPE REFER TO SECTION 3.4.A.2.d OF THE ROAD ORDINANCE.
- B. DRAINAGE CULVERT SHALL BE SIZED FOR A 10 YEAR FREQUENCY STORM AND THE MINIMUM SIZE SHALL BE 15" DIAMETER ROUND OR 11" X 18" ARCH PIPE. IF LARGER PIPE IS REQUIRED, DITCH INVERT SHALL BE LOWER TO PROVIDE MINIMUM DITCH GRADIENT OF 1.0% AND CLEARANCE SHOWN.
- C. SWALE FLOW MAY BE PROVIDED OVER DRIVEWAY LOCATED AT OR NEAR THE CREST OF VERTICAL CURVES ON THE PUBLIC ROAD WHERE QUANTITY OF FLOW IS SMALL, AS APPROVED BY THE COUNTY.
- D. 1) FOR DRIVEWAYS SERVING ONE LOT THE MINIMUM WIDTH SHALL BE 10' & A MAXIMUM OF 16'.
2) FOR DRIVEWAYS SERVING TWO OR MORE LOTS THE MINIMUM WIDTH SHALL BE 16' PER SECTION 3.4.A.2.e OF THE ROAD ORDINANCE.

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

[Signature] 11/19/99
CHIEF OF DEVELOPMENT & CAPITAL SERVICES DATE

[Signature]
HIGHWAY ENGINEER

DATE

STANDARD DETAIL

RESIDENTIAL DRIVEWAY
ENTRANCE
OPEN SECTION

REVISIONS:

R
2.33