


- NOTE A: WHERE CURB & GUTTER EXISTS, REMOVE AND RECONSTRUCT CURB & GUTTER TO FIRST JOINT ON EITHER SIDE OF ENTRANCE.
- B. 1) FOR DRIVEWAYS SERVING ONE LOT THE MINIMUM WIDTH SHALL BE 10' & A MAXIMUM OF 20'.
 2) FOR DRIVEWAYS SERVING TWO OR MORE LOTS THE MINIMUM WIDTH SHALL BE 16' PER SECTION 3.4.A.2.e OF THE ROAD ORDINANCE.

FRONT VIEW

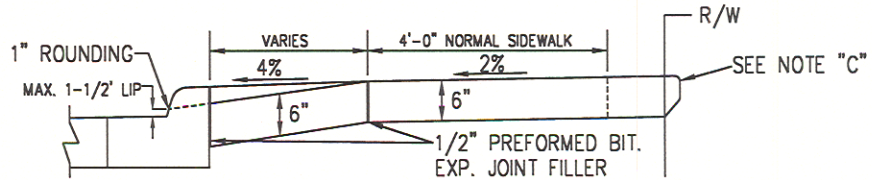

SECTION "A-A"

NOTE C: IF PRIVATE DRIVEWAY IS CONCRETE PROVIDE 1/2" PREFORMED EXPANSION JOINT FILLER AT R/W LINE.

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

CHIEF OF DEVELOPMENT & CAPITAL SERVICES

DATE

[Signature]
 HIGHWAY ENGINEER

11/19/99
 DATE

STANDARD DETAIL
 RESIDENTIAL ENTRANCE
 CLOSED SECTION
 WITH STD. 6"
 COMBINATION CURB &
 GUTTER & SIDEWALK SET
 BACK FROM CURB

REVISIONS:

R
 2.35